

COPIIIIIIII®
SECURITY™
Professional CCTV



INSPIRE *Blue* v2

DVR RANGE

USER MANUAL



Contents

• Logging into the DVR	2
• Mouse menu	3
• Live viewing	4
• Playback	5
• Smartphone viewing setup	9
• Smartphone viewing	10
• Copy to USB/Disc	12
• Using Cop player 2 playback software	16
• Using internet explorer web browser	18
• DVR settings	19
• DVR log	20
• Local record over network	20
• Copy over network	21
• Playback over network	22
• Talkback	23
• PTZ control	24

Logging into the DVR

For a user to be able to use any of the DVR features the user must be logged into the DVR.



To log into the DVR use follow the steps:

Using DVR Front Panel

Press **OK** key
Use ◀ ▶ keys to select username
Using the number keys input password
Press **OK** key to log in

Using IR Remote

Press **OK** key
Use ◀ ▶ keys to select username
Using the number keys input password
Press **OK** key to log in

Using Remote Keyboard

Press **OK** key
Use ◀ ▶ keys to select username
Using the number keys input password (enter button must be pressed after each digit IE: 1>enter>1>enter>1>enter etc)
Press **OK** key to log in

Using Mouse

Click right mouse button
Click ◀ ▶ buttons to select username
Enter password by clicking number buttons
Click **OK** button

Mouse Menu

To access mouse menu, click right mouse button.




- A. Hide mouse tool bar
- B. Access engineer menu
- C. Access playback menu
- D. Access the copy menu
- E. Enable / disable PTZ mode
- F. Audio on/off / Mute alarm
- G. Display installer information
- H. Display single channel full screen
- I. Display 4 channels
- J. Display 6 channels (8 and 16 channel DVR only)
- K. Display 9 channels (8 and 16 channel DVR only)
- L. Display 10 channels (16 channel DVR only)
- M. Display 13 channels (16 channel DVR only)
- N. Display 16 channels (16 channel DVR only)
- O. Start sequence display

In PTZ mode the mouse can also be used to control the movement of the PTZ camera.

To access mouse playback menu, click ► button on mouse menu (see above).

Mouse Playback Menu

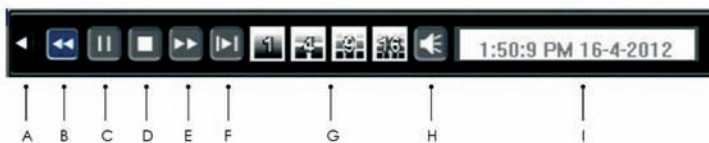

- A. Hide mouse playback bar
- B. Rewind
- C. Pause
- D. Stop
- E. Fast forward
- F. Frame advance
- G. Switch single/multi screen
- H. Mute
- I. Playback time & date



Live View

Changing Display

To change the camera display on the monitor, press “Display” key. Pressing the “Display” key multiple times will cycle through all the available screen layouts. If using the mouse press the right mouse button and select the desired multi screen view from the mouse menu.

To bring up a camera full screen:

DVR Front Panel

- Press desired camera number key.

Infra Red Remote

- Press desired camera number key.

Remote Keyboard

- Press desired number key followed by “enter”.

Mouse


- Using left mouse button double click desired camera channel, or right click to display multi screen view.



Playback

Playback By Time

To access Playback enter the Playback menu and select required time.

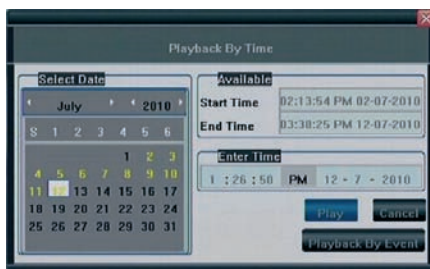

DVR Front Panel

- Press ►|| key to enter search menu
- Press ◀▶▲▼ keys to navigate
- Enter desired time and date using number keys
- Highlight **Play** button and press **OK** key to playback time

Infra Red Remote

- Press ►|| key to enter search menu
- Press ◀▶▲▼ keys to navigate
- Enter desired time and date using number keys
- Highlight **Play** button and press **OK** key to playback time

Remote Keyboard

- Press ►|| key to enter search menu
- Press ◀▶▲▼ keys to navigate
- Enter desired time and date using number keys
- Highlight **Play** button and press **OK** key to playback time

Mouse

- Press **Right** mouse button
- Press left mouse button on **Play**
- Enter desired date and time by left clicking in the Enter Time Field.
- Once desired date time is entered left click on Play

Search Options

Select Date	This shows the current date entered in "Enter Time Field"
Available	This is the available recordings stored on the HDD(s)
Enter Time	This is where the desired date and time are entered

Playback Event

To access Playback By Event menu enter the Playback By Time menu and select Playback By Event.



Maximum of 200 events listed per search

DVR Front Panel

- Press ►|| key to enter search menu
- Press ◀▶▲▼ keys to navigate to Playback By Event and press **OK** key
- Enter desired Start and End Times using ◀▶▲▼ to navigate and number keys to enter individual values
- Select type of event to search for by selecting desired options in Record Type field
- To select or deselect an option highlight the option and press "ok"
- Highlight Search and press **OK** key
- Press ◀▶▲▼ keys to navigate through event list
- When desired event is highlighted press **OK** key
-

Infra Red Remote

- Press ►|| key to enter search menu
- Press ◀▶▲▼ keys to navigate to Playback By Event and press **Enter** key
- Enter desired Start and End Times using ◀▶▲▼ to navigate and number keys to enter individual values
- Select type of event to search for by selecting desired options in Record Type field
- To select or deselect an option highlight the option and press "Enter" button
- Highlight Search and press **Enter** key
- Press ◀▶▲▼ keys to navigate through event list
- When desired event is highlighted press **Enter** key to playback event

Remote Keyboard

- Press ►|| key to enter search menu
- Press ◀▶▲▼ keys to navigate to Playback By Event and press **Enter** key
- Enter desired Start and End Times using ◀▶▲▼ to navigate and number keys to enter individual values (Must remember to press enter after each number)
- Select type of event to search for by selecting desired options in Record Type field
- To select or deselect an option highlight the option and press **Enter** button
- Highlight Search and press **Enter** key
- Press ◀▶▲▼ keys to navigate through event list
- When desired event is highlighted press **Enter** key to playback event

Mouse

- Press right mouse button
- Press left mouse button on **Play**
- Press left mouse button on Playback by Event
- Enter desired Start and End Times by left clicking in the Enter Time Field.
- Select type of event to search for by selecting desired options in Record Type Field. To select or deselect an option press left mouse button on desired option.
- Press left mouse button on **Search**
- Press left mouse button on page selection bar to change page or page field on the right to input page number manually
- To playback an event double click the desired event in the list

Search Options

Enter Time	This is where you enter the start and end times to search between
Available	Recording times available
Record Type	Which type of event to search for, options are Alarm, Motion, V-Loss or All
Page Select	If the amount of events returned in a single search is more than can be displayed at once then multiple pages of events are listed
Previous Day /Next Day	List events from next day or previous day



Playback Control

To control the various playback functions, you can use the following steps:



Front Panel

- Press ◀▶▲▼ keys to change playback speed and direction
- Press **Display** key to cycle through quad screens or full screen cameras
- Press number keys to bring it up camera full-screen (must be a camera in the current quad display)
- To forward the video by one frame at a time first pause the video then press the ▶ key.
- To exit playback press the **Backup** key

Infra Red Remote

- Press ◀▶▲▼ keys to change playback speed and direction
- Press **Display** key to cycle through quad screens or full screen cameras
- Press number keys to bring it up camera full-screen (must be a camera in the current quad display, for channels 10 and onwards press 10+ key followed by number)
- To forward the video by one frame at a time first pause the video then press the ▶ key
- To exit playback press the **Backup** key

Remote Keyboard

- Move joystick ◀▶▲▼ or use ◀▶▲▼ keys to change playback speed and direction
- Press **Display**key to cycle through quad screens or full screen cameras
- Press number keys to bring up camera full-screen (must be a camera in the current quad display and must press enter after entering digit)
- To forward the video by one frame at a time first pause the video then press the ▶ key or move joystick to the right
- To exit playback press the **Backup** key

Mouse

- Press right mouse button to bring up mouse playback menu
- Using left mouse button double click desired camera channel, or right click to display multi screen view.



Smartphone Viewing Setup

All Inspire DVRs can be viewed on smartphones if they are connected to the internet.

Requirements

Apple iPhone /iPad or smartphones using Android, Symbian or Windows operating systems
GPRS, 3G or Wi-fi connection
DVR connected to the internet
Access to phone App store

Connecting

Connect the DVR to the internet.

Install application

Using the smartphone connect to your phones app store/market place.

iPhone/iPad

Search for vMeye, download and install this application (it's free).

Android

Search for vMeye, download and install this application (it's free).

Symbian

Search for vMeye, download and install this application (it's free).

Windows 6

To connect to the DVR follow these steps:

- Run your phones Internet browser
- In the address bar type the DVR IP Address followed by /download.html
- Example: If the DVR IP Address is 192.168.0.100 then type
<http://192.168.0.100/download.html>
- When the web page loads choose the correct software for your phone and install

[Windows Mobile 5.0/6.0/6.1 English Version](#)

[Windows Mobile 5.0/6.0/6.1 ç@€ä½“ä æ-†ç%[^]](#)



- Once installed run the application and add your DVR settings
- Click connect to connect the DVR



Smartphone Viewing

Viewing the DVR

This guide shows how to connect using an iPhone, but all smartphone apps require the same information to connect to the DVR.

- Start vMeye App
- Press Settings button



Start
Application



Press
Settings

- Click Add
- Enter device name (for your reference)
- Enter the IP address of the DVR in to Address: (example **84.92.95.178**)
- Enter the mobile port number in to PORT: **7050** (this is the DVR default)
- Enter a user ID and password
- Default user ID: **Admin** (case sensitive)
- Default password: **888888**
- Press Save and you DVR settings will be saved



- Click DVR on device list
- Select camera to view

On the free applications, you can only view live images one channel at a time.

Application Controls




- A. Select channel to view
- B. PTZ Control
- C. Select next channels
- D. Connect/Disconnect
- E. Take a snapshot and save to iPhone photos
- F. Settings
- G. App Information



Copy To Disk Or USB

The DVR is capable of copying recorded footage to the internal CD/DVD or via USB to a memory stick, external HDD or external CD/DVD disk drive.

Copy By Time

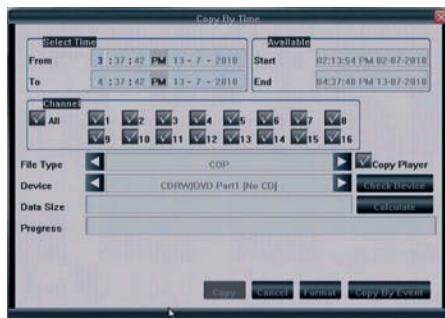

DVR Front Panel

- Press **Copy** key on front panel
- Press **◀▶▲▼** keys to navigate
- Enter desired time and date using number keys
- Select desired cameras to be copied
- Select desired File Type (**◀▶** to select)
- Select desired device to copy to (**◀▶** to select)
- Highlight Calculate and press **OK** to view estimated Data Size and Copy Time
- Highlight Copy and press **OK** to start backup

Infra Red Remote

- Press **Copy** key
- Press **◀▶▲▼** keys to navigate
- Enter desired time and date using number keys
- Select desired cameras to be copied
- Select desired File Type (**◀▶** to select)
- Select desired device to copy to (**◀▶** to select)
- Highlight Calculate and press **Enter** to view estimated Data Size and Copy Time
- Highlight Copy and press **Enter** to start backup

Remote Keyboard

- Press **Copy** key
- Press ◀▶▲▼ keys to navigate
- Enter desired time and date using number keys
- Select desired cameras to be copied
- Select desired File Type (◀▶ to select)
- Select desired device to copy to (◀▶ to select)
- Highlight Calculate and press enter to view estimated Data Size and Copy Time
- Highlight Copy and press **Enter** to start backup

Mouse

- Right click mouse to bring up mouse menu
- Left click **Copy** icon
- Enter desired Start and End Times by left clicking in the Select Time Field.
- Left click mouse on required channel boxes
- Select File Type by clicking ◀▶ icons to change
- Select device by clicking ◀▶ icons to change
- Press left mouse button on Calculate to view estimated Data Size and Copy Time
- Left click **Copy** to start the backup

Copy Options

Select Time	This is where the required Start and End Times for backed up video are set
Available	This is the available recordings stored on the HDD(s)
Channel	This is where the desired channels to be copied are selected
File Type	This is where the desired file format for playback on a PC is set. If set to Cop then the backed up recordings will require the Cop Player 2 software to be able to view the recordings on a PC. If set to AVI the recordings will playback in applications such as Windows Media Player on the majority of PCs
Cop Player	This is the option to include the Cop Player 2 software on the backup media. If copying recordings as Cop format then Cop Player 2 is required to play the recordings back
Device	Select whether backing up to Disk or to USB Media
Data Size	This estimates the total size of the backup in megabytes and amount of time required to perform the backup based on the entered parameters



Copy By Event



Front Panel

- Press **Copy** key on front panel
- Press ◀▶▲▼ keys to navigate
- Highlight Copy By Event and press **OK**
- Enter desired Start and End Times using ◀▶▲▼ to navigate and number keys to enter individual values
- Highlight search and press **OK**
- Use ▲▼ to move up and down event list and use ◀▶ to change page
- Press **OK** on events to copy
- Select desired device to copy to (◀▶ to select)
- Highlight Calculate and press **OK** to view estimated Data Size and Copy Time
- Highlight Copy and press **OK** to start backup

Infra Red Remote

- Press **Copy** key
- Press ◀▶▲▼ keys to navigate
- Highlight **Copy** By Event and press **Enter**
- Enter desired Start and End Times using ◀▶▲▼ to navigate and number keys to enter individual values
- Highlight search and press **Enter**
- Use ▲▼ to move up and down event list and use ◀▶ to change page
- Press **Enter** on events to copy
- Select desired device to copy to (◀▶ to select)
- Highlight Calculate and press **Enter** to view estimated Data Size and Copy Time
- Highlight Copy and press **Enter** to start backup

Remote Keyboard

- Press **COPY** key
- Press ◀▶▲▼ keys to navigate
- Highlight Copy By Event and press **Enter**
- Enter desired Start and End Times using ◀▶▲▼ to navigate and number keys to enter individual values (remember to press enter after each value)
- Highlight search and press **Enter**
- Use ▲▼ to move up and down event list and use ◀▶ to change page
- Press **Enter** on events to copy
- Select desired device to copy to (◀▶ to select)
- Highlight Calculate and press **Enter** to view estimated Data Size and Copy Time
- Highlight Copy and press **Enter** to start backup

Mouse

- Right click mouse to bring up mouse menu
- Left click **Copy** icon
- Left click on Copy By Event
- Enter desired Start and End Times by left clicking in the Select Time Field.
- Select type of event to search for by selecting desired options in Record Type Field. To select or deselect an option press left mouse button on desired option.
- Press left mouse button on **Search**
- Press left mouse button on page selection bar to change page or page field on the right to input page number manually
- To select an event to copy left click the desired event(s) in the list
- Select desired device to copy to (◀▶ to select)
- Highlight Calculate and press **Enter** to view estimated Data Size and Copy Time
- Highlight Copy and press **Enter** to start backup

Copy Options


Select Time	This is where the desired Start and End times are entered for searching the event list
Available	This is the available recordings stored on the HDD(s)
Record Type	Which type of event to search for, options are Alarm, Motion, V-Loss or All
Page Select	If the amount of events returned in a single search is more than can be displayed at once then multiple pages of events are listed
Device	Select device to copy to
Data Size time	This estimates the total size of the backup in megaBytes and amount of required to perform the backup based on the entered parameters



Using COP Player 2 Software

When making a backup to CD/DVD or via USB media if the file format chosen is Cop then the Cop Player 2 software is vital in order to playback the recordings.


After inserting the disk or USB media containing the copied recordings into a PC double click the Cop Player 2 icon. This will run the Cop Player 2 software.



To open a file containing recordings click on the Open File icon



Click on the file that you wish to playback and then click Open

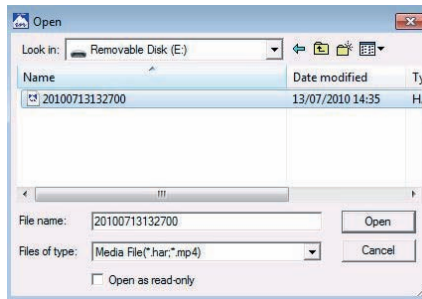

The Cop player software will now open and display the selected video file.




To bring a camera up full-screen, double click on desired camera or use the full-screen icon on the right hand side of the viewer.

If required, the recordings can be converted to AVI format, this will enable them to be played back in most viewing applications such as Windows Media Player.


To do this click on the video camera icon at the bottom of the viewer.




Select the camera channel you would like to convert and if you wish to include audio. Then click next.

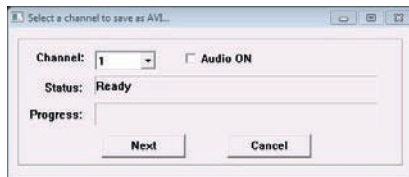

When prompted, select a destination for the new AVI file to be saved.

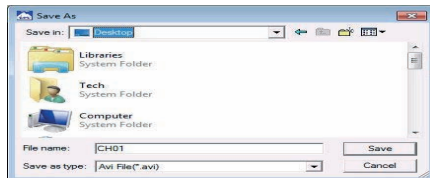

The AVI window will disappear and once the AVI conversion is complete the viewer will display a window to confirm it was completed successfully.



There are also options to save a Snap Shot or Print Image in the bottom right of the viewer.



Connecting via PC or Apple Mac

Connecting via Apple Mac


Enter the Mac app store and search for “**MeyePro**”, once installed refer to **page 10** “Smartphone Viewing” for app connection settings.

Note: Viewing on a Apple Mac currently only supports live viewing of the DVR, the features listed below for Windows PC’s are not currently available for Apple Mac.

Connecting via Windows PC

To start, open up Internet Explorer and type the DVR IP address into the address bar and press enter. (e.g. <http://192.168.0.100>)

When connecting to the DVR for the first time, installation of the DVR Activex control is required. Usually a pop-up bar will appear.

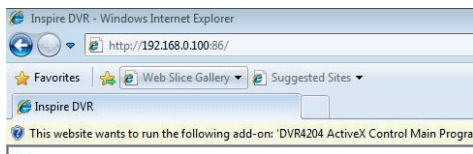

Right click on the pop-up bar and choose install.

Note: Depending on internet explorer security settings the ActiveX control may not install, for further advice contact your network administrator.

Once the ActiveX is installed correctly the user should be presented by the Inspire Log On screen.




To log in the user must type both their Username and Password into the required fields.

Note: Default Username is Admin (case sensitive)
Default Password is 888888

Once the required fields have been entered click login button.

Live Images

Once logged into the DVR the user will be presented with the live images screen.

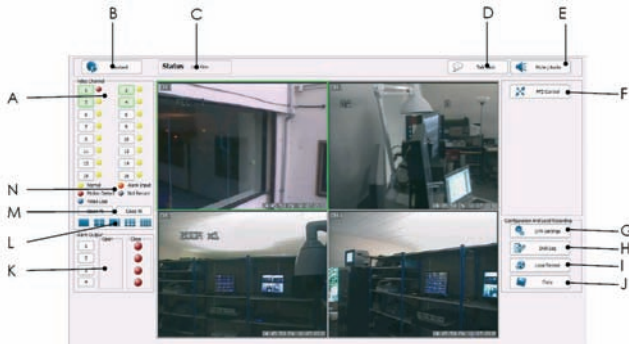

- A. Camera selection
- B. Playback
- C. Current view mode
- D. Talkback
- E. Mute audio
- F. PTZ control
- G. DVR settings
- H. DVR log
- I. Local record
- J. Copy
- K. Remote alarm relays
- L. Screen view selection
- M. Open/close stream
- N. Record status indicator



DVR Settings

The device parameters feature allows the user to change settings that are saved on the DVR such as record settings, event settings and more.





DVR Log

The DVR keeps a log of events such as illegal power downs, motion detection events, alarm input triggers and more.

The user can search for specific times or type of events using the options at the top of the window.

No.	Type	Sub-Type	Detail	Ch.	Time	Operator
698	Oper...	Remote Login	None	-	2010-07-09 12:18:35	Admin
698	Oper...	Local config parameters	local motion set	1	2010-07-09 12:17:28	Admin
697	Alarm	Motion Detection Alarm End	None	1	2010-07-09 12:16:49	Admin
696	Alarm	Motion Detection Alarm Begin	None	1	2010-07-09 12:16:37	Admin
696	Oper...	Local config parameters	local motion set	1	2010-07-09 12:15:50	Admin
700	Oper...	Local config parameters	local motion set	1	2010-07-09 12:15:45	Admin
701	Alarm	Motion Detection Alarm End	None	1	2010-07-09 12:15:21	Admin
702	Alarm	Motion Detection Alarm Begin	None	1	2010-07-09 12:15:08	Admin
703	Alarm	Motion Detection Alarm End	None	1	2010-07-09 12:15:00	Admin
704	Alarm	Motion Detection Alarm Begin	None	1	2010-07-09 12:14:50	Admin
705	Alarm	Motion Detection Alarm End	None	1	2010-07-09 12:14:43	Admin
706	Alarm	Motion Detection Alarm Begin	None	1	2010-07-09 12:14:32	Admin
707	Alarm	Motion Detection Alarm End	None	1	2010-07-09 12:13:53	Admin
708	Alarm	Motion Detection Alarm Begin	None	1	2010-07-09 12:13:37	Admin
709	Alarm	Motion Detection Alarm End	None	1	2010-07-09 12:13:32	Admin
710	Alarm	Motion Detection Alarm Begin	None	1	2010-07-09 12:12:14	Admin
711	Oper...	Local config parameters	local motion set	1	2010-07-09 12:12:11	Admin
712	Oper...	Local config parameters	local motion set	1	2010-07-09 12:11:46	Admin
713	Oper...	Local login	None	-	2010-07-09 12:11:13	Admin
714	Oper...	Boot up	None	-	2010-07-09 12:10:29	Admin
715	Oper...	Abnormal Shutdown	None	-	2010-07-09 12:09:21	Admin
716	Oper...	Clean Log	None	-	2010-07-09 12:08:54	Admin

The log can also be exported to the remote PC as a html file. This enables the user to be able to copy the log to a removable device or even email it.

Note: Searching the full or large sections of the log may take several minutes dependant on amount of event entries.



Local Record Over Network

If, when viewing the camera images over the network the user would like to save the live stream to the PC, the user can use the Local Record feature.

Local Record

Local Record

Record File: ...

Record Time: 5 minutes

Start Record

To use Local Record click the Local Record button and select your file destination, how long to record the stream for and click Start Record. Local Record can be stopped at any time by clicking the Stop Record button.

Note: The Cop Player 2 software will be required to playback remote recordings, this can be downloaded from the Copy Menu.



Copy Over Network

If there are recordings on the DVR HDD(s) that need to be retrieved remotely this can be done using the Copy feature.

To use the Copy feature:

- Click **Copy**
- Enter required start and end times (available recordings on HDD(s) are listed above start time drop down box)
- Select cameras to copy in Video Channel field
- Click **Query Data Size** to get an estimate of the total size of the requested recordings.
- Click **Copy** and choose file name and destination


After save destination has been chosen the remote copy will start and the progress bar at the bottom of the screen will show the copy progress in percent.

Note: The Cop Player 2 software will be required to playback copied recordings, this can be downloaded by clicking the Cop Player button. Please also note that remote copying recordings can take a very long time depending on amount of cameras and amount of time requested.

Playback Over Network

Playback by Time

The viewing of recordings stored on the DVR HDD(s) can be done using the Playback feature.

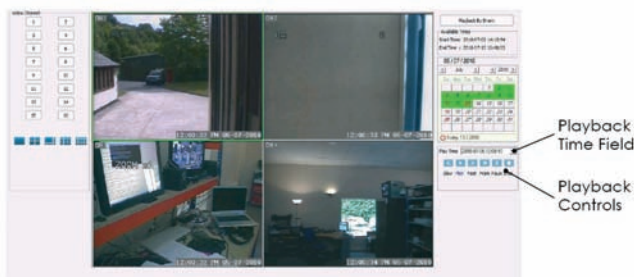


To playback images enter the desired time into the Play Time field on the right side of the browser and click play.

To change playback screen layout click the screen icons on the left of the browser.

Playback by Event

To playback by Motion, Alarm or Video Loss event, click the Playback by Event button in the top right of the browser.

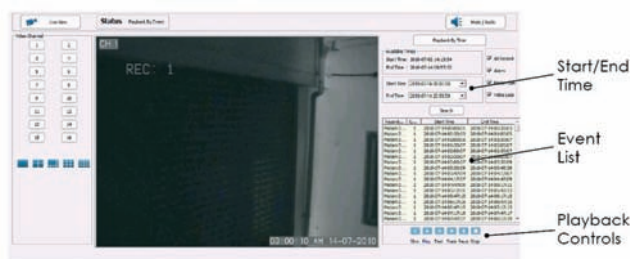

Available recording times stored on the DVR HDD(s) appear at the top right of the web browser.

To search for an Event select a start and end time in the Start and End time fields on the right of the browser and click search.

Note: Searches that exceed a 24 hour period may take a long time to return results

To playback an event from the event list click the desired event to highlight it and click on play icon.



Talkback

Duplex Talkback

The DVR features a full duplex talkback system. When a microphone is connected to the Line Input (plus model, or audio input 1 on standard unit), and a broadcast unit is connected to the audio output of the DVR click the Talkback button at the top of the browser.





Once Talkback has been selected the audio stream from the DVR Line Input will be played through speakers or a headset connected to the remote PC.

Broadcast

If a microphone is also connected to the PC then when the user talks their voice will be broadcast out through the DVR audio output.

Audio

The DVR can support up to sixteen microphones (model dependant). To listen to the audio from a required channel, select the channel in full-screen. The audio will now be played through the remote PCs speakers or headset, providing microphones are connected to the audio inputs of the DVR.



Note: It is not possible to use duplex talkback or broadcast when using audio microphones with camera inputs.



PTZ Control

PTZ Control

The DVR web browser supports control of PTZ cameras if connected and programmed in the DVR.

To use the PTZ feature single click on desired camera (green border highlights selected camera) then press the PTZ button.

This will bring up the PTZ Interface



PTZ

Speed Select the speed in which the PTZ camera moves

Note: This may be limited by the capabilities of the PTZ camera connected

◀▶▲▼ Pan or Tilt the camera

Zoom Zoom the PTZ camera in or out

Iris Open or close the iris (this will make the image brighter or darker)

Focus Adjust focus far or near

Preset Select preset position then click Go to move to position or Set to save current position as selected preset number.

COP  [®]
SECURITY [™]
Professional CCTV